

TALC FOR SPIN CASTING TALCO PARA SPIN CASTING

55103002

20 kg

CHARACTERISTICS

- Anti-allergic organic powder
- Fine grain **5-10 µm** (natural talc: 15-50 µm)

Usage

It notably facilitates the metal flow inside the silicone mould.

It allows to let out the air during the passage of the metal more easily.

It is also employed as a release agent silicone-silicone during the creation of moulds

CARACTERÍSTICAS


- Polvo orgánico antialérgico
- Grano fino **5-10 µm** (talco natural: 15-50 µm)

Uso

Facilita notablemente el flujo del metal en el interior del molde de silicona.

Permite dejar salir el aire durante el paso del metal con mayor facilidad.

También se emplea como desmoldeante silicona-silicona durante la creación de moldes.

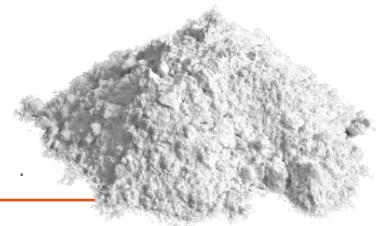


Suitable to both improve the metal flow and as a silicone-silicone realising agent.

Adecuado tanto para mejorar la fluidez del metal como como desmoldeante silicona-silicona.

SILICONE RUBBERS FOR SPIN CASTING CAUCHOS DE SILICONA PARA SPIN CASTING

Low temperature
Baja temperatura



High temperature
Alta temperatura



Bellavista N.42 Bodega N. 6
San Juan Xalpa
09850 IZTAPALAPA
CIUDAD DE MÉXICO



(+52) 5556136477
(+52) 5556136212
(+52) 5556123770



www.nicem.mx



(+52) 5616796342



Nicem México



nicem.mx